



REEM WATER HEATER FACTORY



AUTOMATIC PRODUCTION LINE

CONFORMING TO NATIONAL AND INTERNATIONAL STANDARDS



SASO-GSO
1858/2012



ISO 9001:2015



Address: 2nd Industrial City, Riyadh,
Kingdom of Saudi Arabia

Tel. No.: +966 11 265 2162

www.reem.com.sa

info@reem.com.sa

[reemfactory](https://twitter.com/reemfactory)

Customer Care: +966 92 000 8204



ESTABLISHED

1983

5 YEARS WARRANTY



AUTOMATIC PRODUCTION LINE

CONFORMING TO NATIONAL AND INTERNATIONAL STANDARDS

REEM water heaters factory aim since it was established in 1983 to provide the local market with innovative hot water solutions, and soon grew success to include integrated production lines to suit residential and commercial customer requirements.

REEM water heaters factory created a work environment in compliance with international quality standards to enforce product quality achieving highest customer satisfaction.





QUALITY STATEMENT POLICY

The **REEM** Quality Management System, which includes this policy, provides the framework throughout which a formal, and continuing program of review is adopted and fully supported so that products, services and effectiveness of systems, objectives and targets may be continually measured and improved.

OBJECTIVES

To established and communicate business related objectives and risk with relevant functions and levels with in the company and to continually seek opportunities for improvement.

To promote a culture and environment that is conducive in delivering customer delight.

To ensure that the requirements of all products are fully defined and visible and they meet or exceed the requirements, expectations of customers.



REEM WATER HEATER FACTORY




REEM water heater factory is a wide range manufacturer of **LIMA** brand electric water heater products a food grade inner coatings providing effective solutions for corrosions, designed for safety and saving energy with high quality and good performance for long lasting hot water use in any household chores.



DOMESTIC WATER HEATER SPECIFICATION




MODEL NO.	BRAND	CAPACITY Liter	VOLTS (V)	WATTS (W)	HERTZ (Hz)	PHASE (PH)	DIMENSION (mm)						PACKING DIMENSION (mm)	WEIGHT (Kg)
							ØA	B	C	D	E	F		
L30VS	LIMA	30	220V/240V	1.1	50/60	1	430	405	100	226	235	455	465X465X465	13.5
L50VN	LIMA	50	220V/240V	1.2	50/60	1	430	575	100	226	235	455	465X465X605	17.5
L80VN	LIMA	80	220V/240V	1.5	50/60	1	430	835	100	226	235	455	465X465X865	24.0
L100VN	LIMA	100	220V/240V	1.5	50/60	1	430	980	100	226	235	455	465X465X1010	28.0
L120VN	LIMA	120	220V/240V	2	50/60	1	430	1155	100	226	235	455	465X465X1185	32.0
L150VN	LIMA	150	220V/240V	3	50/60	1	430	1295	100	226	235	455	465X465X1325	36.0

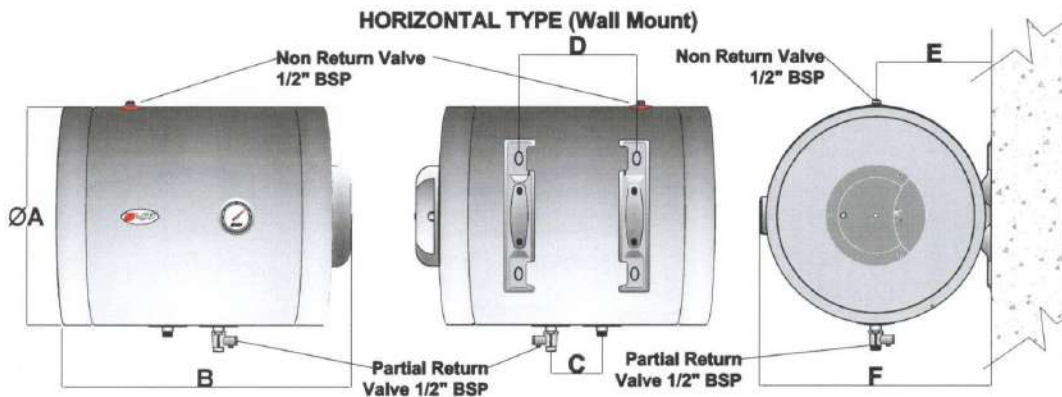


MODEL NO.	BRAND	CAPACITY Liter	VOLTS (V)	WATTS (W)	HERTZ (Hz)	PHASE (PH)	DIMENSION (mm)						PACKING DIMENSION (mm)	WEIGHT (Kg)
							ØA	B	C	D	E	F		
L30HS	LIMA	30	220V/240V	1.1	50/60	1	430	395	100	160	235	455	465X465X465	14.5
L50HN	LIMA	50	220V/240V	1.2	50/60	1	430	565	100	220	235	455	465X465X605	18.5
L80HN	LIMA	80	220V/240V	1.5	50/60	1	430	825	100	480	235	455	465X465X865	25.0
L100HN	LIMA	100	220V/240V	1.5	50/60	1	430	970	100	660.5	235	455	465X465X1010	29.0
L120HN	LIMA	120	220V/240V	2	50/60	1	430	1145	100	835.5	235	455	465X465X1185	33.0
L150HN	LIMA	150	220V/240V	3	50/60	1	430	1285	100	975.5	235	455	465X465X1325	37.0

PARTS


VERTICAL MODEL

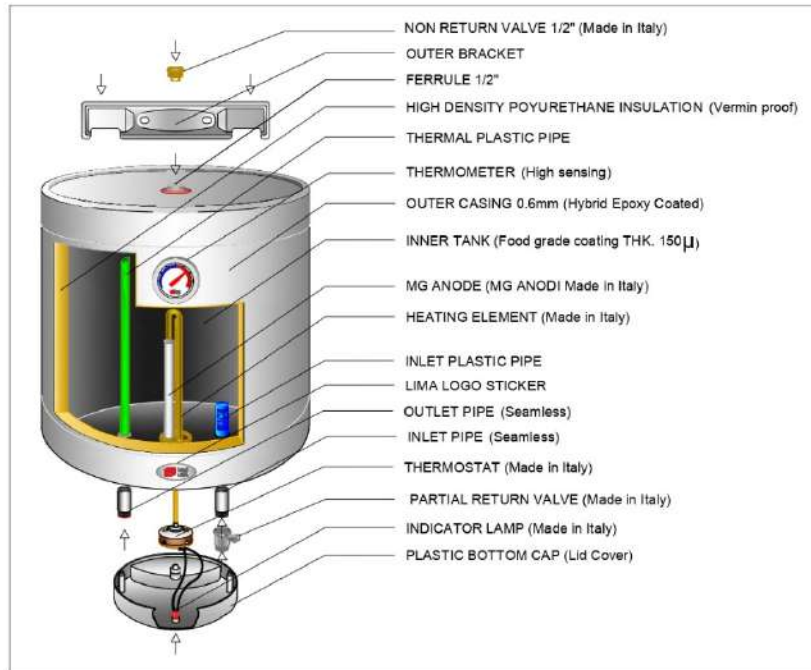

HORIZONTAL MODEL

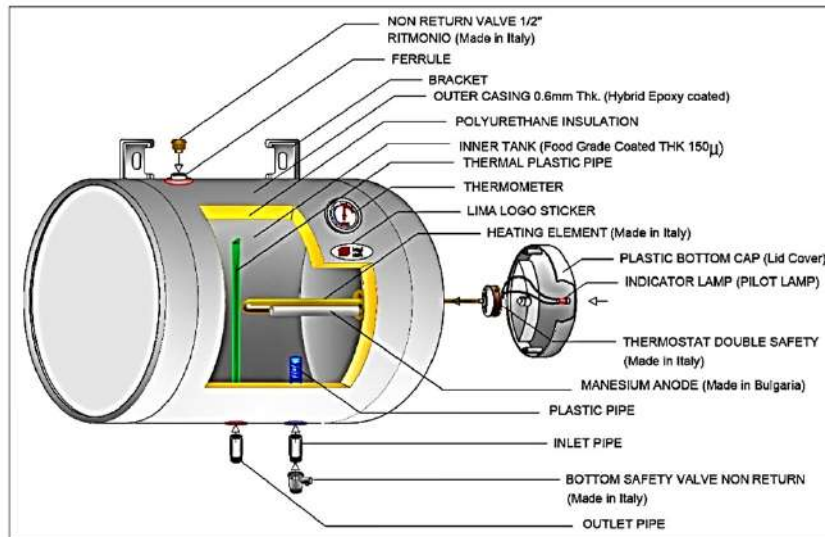

DOMESTIC WATER HEATER MATERIALS

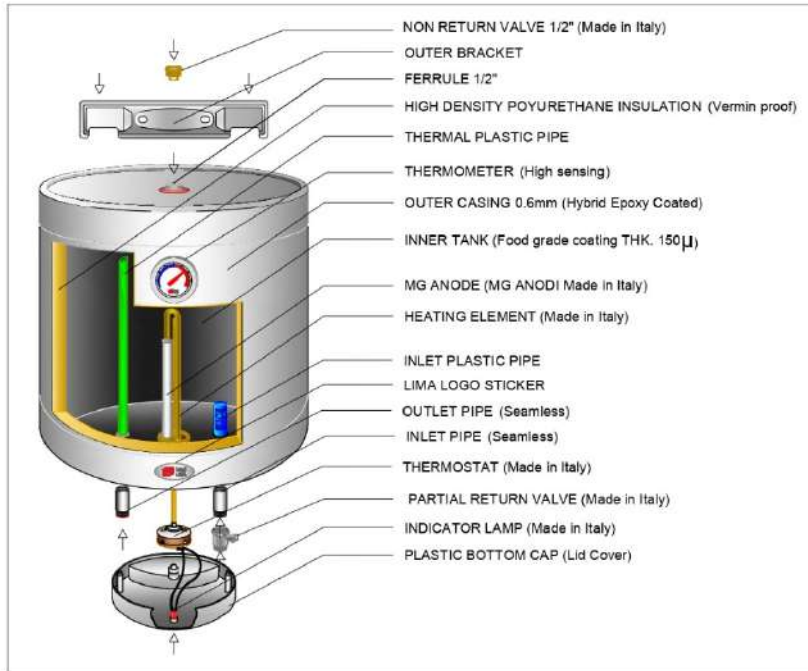


HEATING ELEMENT



THERMOSTAT



SAFETY VALVES

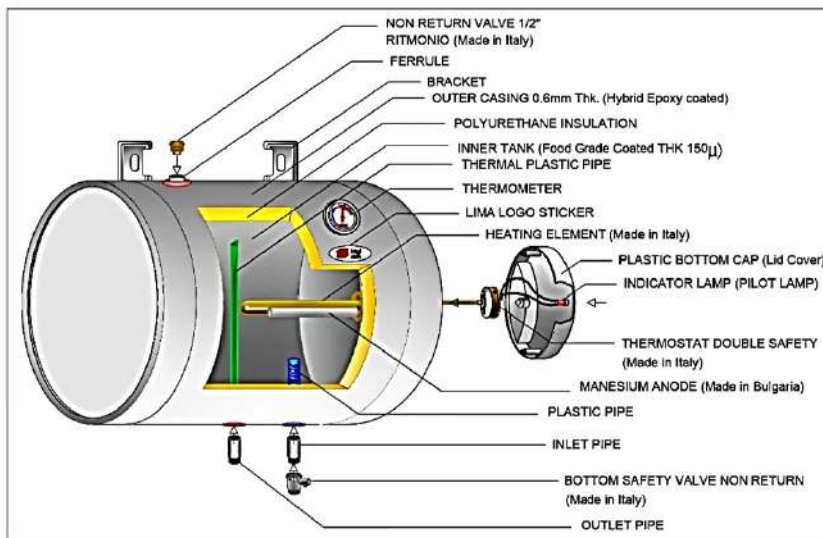

THERMOMETER




MAGNESIUM ANODE



INDICATOR LAMP

REEM WATER HEATER FACTORY

* Customized design are available as per request.
 * Please contact us for request of different kW, voltage rates or storage section material.

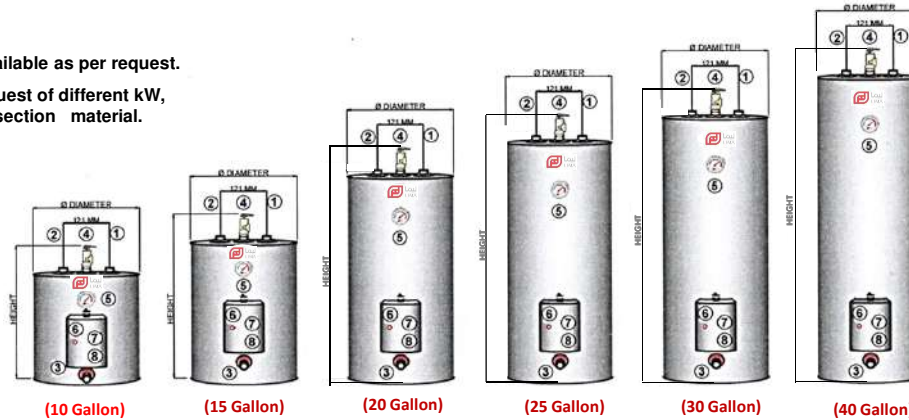


AMERICAN DESIGN


1. INLET PIPE : 3/4" BSP
2. OUTLET PIPE : 3/4" BSP
3. DRAIN LINE : 3/4" BSP
4. T&P VALVE : SIZE 3/4"
5. THERMOMETER
6. ELECTRICAL BOX
7. THERMOSTAT
8. HEATING ELEMENT

MODEL:		CAPACITY:		BRAND:	TYPE:	MOUNTING:	INGRESS PROTECTION	DIAMETER: Ø (MM)		HEIGHT: (MM)		VOLTS: (V)	WATTS: (kW)	HERTZ: (Hz)	PHASE: (Ph)	RATED PRESSURE: (Psi/BAR)	PRESSURE TEST: (Psi/BAR)	WORKING TEMP. (°C)
(Liter)	(Gallon)	(Liter)	(Gallon)					(Liter)	(Gallon)	(Liter)	(Gallon)							
L30VFM	L10GVFM	30	10	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	430	392	425	220V/240V	1.1	50/60	1	150/10	300/20	65	
L50VFM	L15GVFM	50	15	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	430	562	595	220V/240V	1.2	50/60	1	150/10	300/20	65	
L80VFM	L20GVFM	80	20	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	430	822	855	220V/240V	1.5	50/60	1	150/10	300/20	65	
L100VFM	L25GVFM	100	25	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	430	967	1000	220V/240V	1.5	50/60	1	150/10	300/20	65	
L120VFM	L30GVFM	120	30	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	430	1142	1175	220V/240V	2	50/60	1	150/10	300/20	65	
L150VFM	L40GVFM	150	40	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	430	1282	1315	220V/240V	3	50/60	1	150/10	300/20	65	

EUROPEAN DESIGN

1. INLET PIPE : 3/4" BSP
2. OUTLET PIPE : 3/4" BSP
3. RETURN LINE : 3/4" BSP
4. DRAIN LINE : 3/4" BSP
5. T&P VALVE : SIZE 3/4"
6. THERMOMETER
7. ELECTRICAL BOX
8. THERMOSTAT
9. HEATING ELEMENT

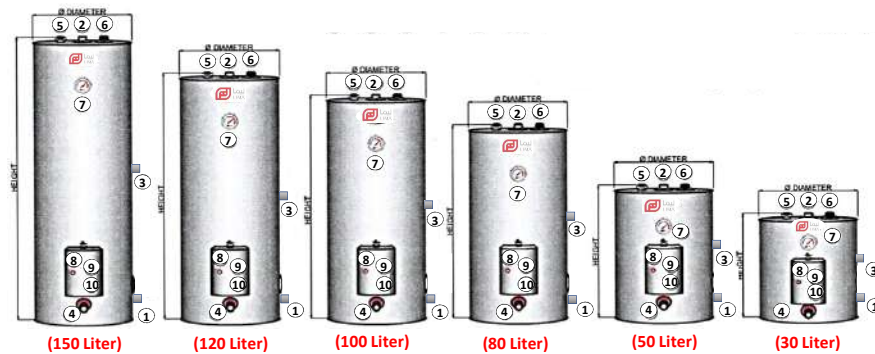

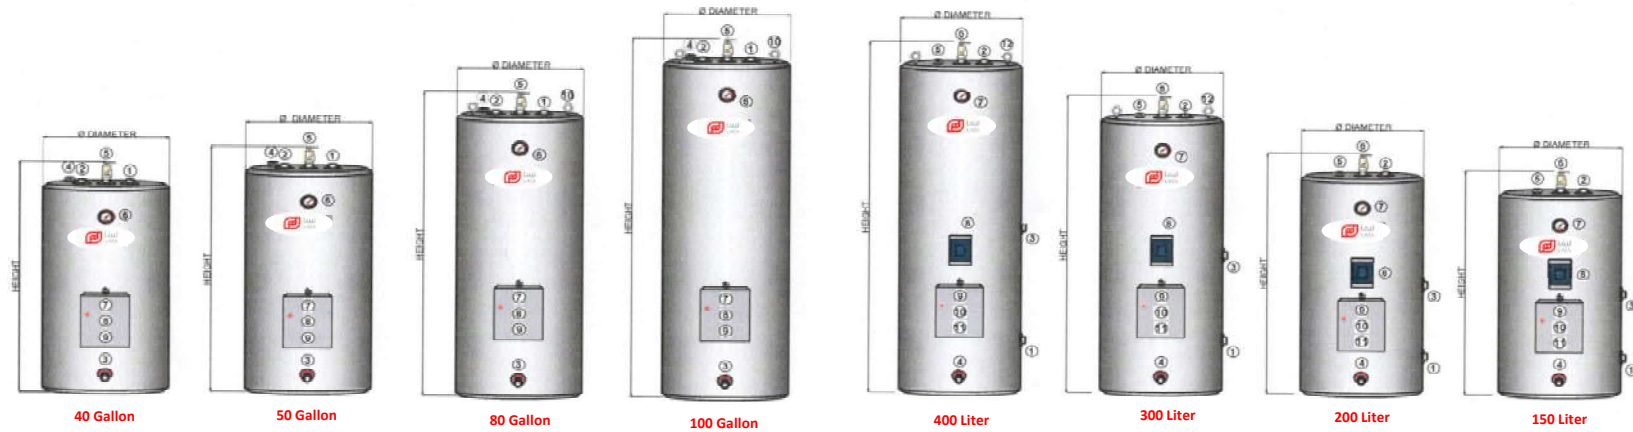

AMERICAN DESIGN

- | | |
|---------------------------|---------------------|
| 1. INLET PIPE : 3/4" BSP | 6. THERMOMETER |
| 2. OUTLET PIPE : 3/4" BSP | 7. ELECTRICAL BOX |
| 3. DRAIN : 3/4" BSP | 8. THERMOSTATS |
| 4. MG ANODE : Ø 27 MM | 9. HEATING ELEMENTS |
| 5. T&P/SASO VALVE : 3/4" | 10. LIFTING HOOK |

EUROPEAN DESIGN

- | | |
|---------------------------|----------------------|
| 1. INLET PIPE : 3/4" BSP | 7. THERMOMETER |
| 2. OUTLET PIPE : 3/4" BSP | 8. MCB |
| 3. RETURN LINE : 3/4" BSP | 9. ELECTRICAL BOX |
| 4. DRAIN : 3/4" | 10. THERMOSTATS |
| 5. MG ANODE : Ø 27 MM | 11. HEATING ELEMENTS |
| 6. T&P/SASO VALVE : 3/4" | 12. LIFTING HOOK |


MODEL:		CAPACITY:		BRAND:	TYPE:	MOUNTING:	INGRESS PROTECTION	DIAMETER: Ø (MM)	HEIGHT: (MM)	VOLTS: (V)	WATTS: (kW)	HERTZ: (Hz)	PHASE: (Ph)	RATED PRESSURE: (Psi/BAR)	PRESSURE TEST: (Psi/BAR)	WORKING TEMP. (°C)
(Liter)	(Gallon)	(Liter)	(Gallon)													
L150VFM	L40GVFM	150	40	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	560	1085	220V/240V	4.0	50/60	1	150/10	300/20	65
L200VFM	L50GVFM	200	50	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	560	1125	220V/240V	4.0	50/60	1	150/10	300/20	65
L300VFM	L80GVFM	300	80	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	560	1525	220V/240V	6.0	50/60	1	150/10	300/20	65
L400VFM	L100GVFM	400	100	LIMA	COMMERCIAL WATER HEATER	VERTICAL FLOOR MOUNT	IP24	760	1230	220V/240V	6.0	50/60	1	150/10	300/20	65

* Customize design are available as per request.

* Please contact us for request of different kW, voltage rates or storage section material.

CUSTOMIZED DIGITAL CALORIFIER

400 Liter / 500 Liter

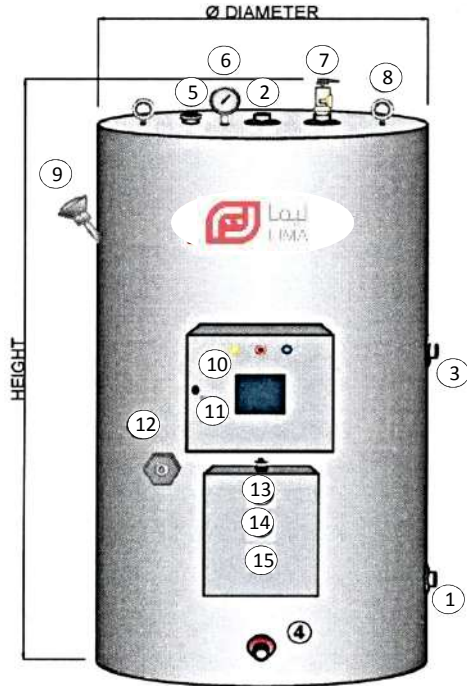

400 Liter



500 Liter

SPECIFICATION

DESCRIPTION		
Model:	L400VFM	L500VFM
Type:	Commercial EWH	Commercial EWH
Brand:	LIMA	LIMA
Capacity:	400 Liter	500 Liter
Mounting:	Vertical floor mount	Vertical floor mount
Diameter:	Ø760 MM	Ø760 MM
Height:	1230 MM	1490 MM
Rated voltage:	380Vac/400Vac	380Vac/400Vac
Rated power:	As per customer requirements	
Hertz:	50/60 Hz	50/60 Hz
Phase:	3PH	3PH
Rated pressure:	150 Psi/ 10 BAR	150 Psi/ 10 BAR
Pressure test:	300 Psi/ 20 BAR	300 Psi/ 20 BAR
Working temp.:	65°C	65°C

- 1. COLD WATER INLET : 3/4" BSP
- 2. HOT WATER OUTLET : 3/4" BSP
- 3. RETURN LINE : 3/4" BSP
- 4. DRAIN VALVE : 3/4" BSP
- 5. MG ANODE : Ø27 MM
- 6. TEMP. GAUGE : 1/2"
- 7. T&P VALVE : 3/4"
- 8. LIFTING HOOK : 2 PCS, 5/8"
- 9. PT 100 SENSOR
- 10. DIGITAL CONTROL PANEL (IP66)
- 11. HMI (TOUCH SCREEN MONITOR)
- 12. WATER LEVEL SENSOR
- 13. ELECTRICAL BOX Anti static (IP55)
- 14. HEATING ELEMENTS
- 15. THERMOSTATS

CUSTOMIZED CALORIFIER VERTICAL FLOOR MOUNT

750 Liter – 10000 Liter

SPECIFICATION

TYPE	: COMMERCIAL WATER HEATER
MODEL	: L750VFM - L10000VFM
BRAND	: LIMA
MOUNTING	: VERTICAL FLOOR MOUNT
VOLTAGE	: As per customer requirements
POWER	: As per customer requirements
RATED PRESSURE	: 150 Psi/ 10 BAR
PRESSURE TEST	: 300 Psi/ 20 BAR
TEMP. SETTING	: 65°C

PARTS

- | | |
|----------------------|----------------------------------|
| 1. INLET PIPE | 11. LIFTING HOOK |
| 2. OUTLET PIPE | 12. PT100 SENSOR |
| 3. RETURN LINE | 13. CONTROL PANEL |
| 4. DRAIN LINE | 14. HMI (TOUCH SCREEN MONITOR) |
| 5. MANHOLE | 15. WATER LEVEL SENSOR |
| 6. MAGNESIUM ANODE | 16. ELECTRICAL BOX |
| 7. TEMPERATURE GAUGE | 17. THERMOSTATS |
| 8. PRESSURE GAUGE | 18. HEATING ELEMENTS |
| 9. T&P VALVE | 19. MOUNTING RING |
| 10. AIR VENT VALVE | 20. FOOT (4) |
| | 21. PEDESTAL (Customer provided) |



DESCRIPTION:					DIMENSION:			FITTINGS:			
MODEL	BRAND	CAPACITY		VOLTAGE (V)	WATTS (kW)	Ø DIA. (MM)	HEIGHT (MM)	INLET PIPE	OUTLET PIPE	RETURN LINE	DRAIN
		(liter)	(gallon)								
L750VFM	LIMA	750	198.4	380V/400V, 50/60Hz, 3PH	24	900	2150	1 1/4"	1 1/4"	1 1/4"	1"
L1000VFM	LIMA	1000	264.5	380V/400V, 50/60Hz, 3PH	36	900	2450	1 1/4"	1 1/4"	1 1/4"	1"
L1300VFM	LIMA	1300	343.9	380V/400V, 50/60Hz, 3PH	36	1300	1895	1 1/2"	1 1/2"	1 1/2"	1 1/4"
L1500VFM	LIMA	1500	396.8	380V/400V, 50/60Hz, 3PH	48	1300	2450	1 1/2"	1 1/2"	1 1/2"	1 1/4"
L2000VFM	LIMA	2000	529.1	380V/400V, 50/60Hz, 3PH	60	1300	2550	2"	2"	2"	1 1/4"
L2500VFM	LIMA	2500	661.3	380V/400V, 50/60Hz, 3PH	72	1300	2868	2"	2"	2"	1 1/4"
L3000VFM	LIMA	3000	793.6	380V/400V, 50/60Hz, 3PH	84	1300	3430	NB50	NB50	NB50	1 1/4"
L3500VFM	LIMA	3500	925.9	380V/400V, 50/60Hz, 3PH	96	1600	2586	NB50	NB50	NB50	1 1/4"
L4000VFM	LIMA	4000	1058.2	380V/400V, 50/60Hz, 3PH	108	1600	3090	NB75	NB75	NB75	2"
L5000VFM	LIMA	5000	1322.7	380V/400V, 50/60Hz, 3PH	120	1600	3087	NB75	NB75	NB75	2"
L6000VFM	LIMA	6000	1587.3	380V/400V, 50/60Hz, 3PH	144	1950	2680	NB100	NB100	NB100	2"
L7000VFM	LIMA	7000	1851.8	380V/400V, 50/60Hz, 3PH	156	1950	3090	NB100	NB100	NB100	2"
L8000VFM	LIMA	8000	2116.4	380V/400V, 50/60Hz, 3PH	168	2240	2750	NB100	NB100	NB100	2"
L9000VFM	LIMA	9000	2380.9	380V/400V, 50/60Hz, 3PH	180	2240	3030	NB150	NB150	NB150	3"
L10000VFM	LIMA	10000	2645.5	380V/400V, 50/60Hz, 3PH	192	2240	3338	NB150	NB150	NB150	3"

* 460V and 480V, 3Phase are special, request only.

* 220V, 3Phase are special, request only.

* Customize design are available as per request.

* Contact us for request of different wattage, voltage rates, or storage section material.

CUSTOMIZED CALORIFIER HORIZONTAL FLOOR MOUNT


750 Liter – 10000 Liter

SPECIFICATION

TYPE	: COMMERCIAL WATER HEATER
MODE	: L750VFM - L10000VFM
BRAND	: LIMA
MOUNTING	: VERTICAL FLOOR MOUNT
VOLTAGE	: As per customer requirements
POWER	: As per customer requirements
RATED PRESSURE	: 150 Psi/ 10 BAR
PRESSURE TEST	: 300 Psi/ 20 BAR
TEMP. SETTING	: 65°C

PARTS

- | | |
|----------------------|----------------------------------|
| 1. INLET PIPE | 11. LIFTING HOOK |
| 2. OUTLET PIPE | 12. PT100 SENSOR |
| 3. RETURN LINE | 13. CONTROL PANEL |
| 4. DRAIN LINE | 14. HMI (TOUCH SCREEN MONITOR) |
| 5. MANHOLE | 15. WATER LEVEL SENSOR |
| 6. MAGNESIUM ANODE | 16. ELECTRICAL BOX |
| 7. TEMPERATURE GAUGE | 17. THERMOSTATS |
| 8. PRESSURE GAUGE | 18. HEATING ELEMENTS |
| 9. T&P VALVE | 19. MOUNTING SKID |
| 10. AIR VENT VALVE | 20. PEDESTAL (Customer provided) |

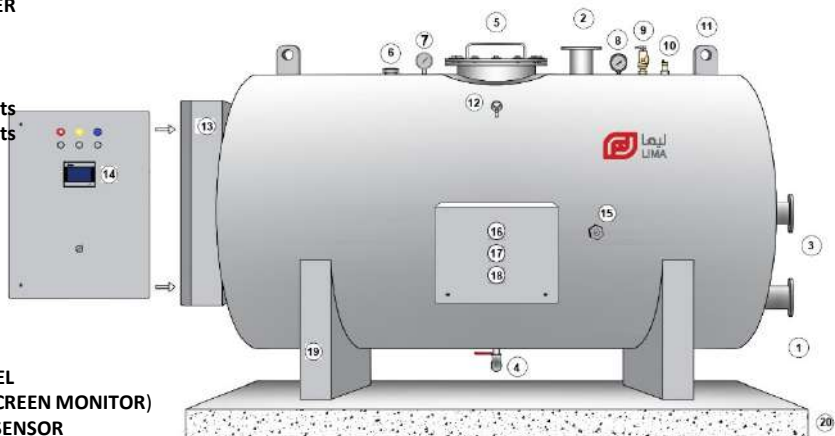

MODEL	BRAND	DESCRIPTION:		VOLTAGE (V)	WATTS (kW)	DIMENSION:			FITTINGS:			
		CAPACITY (liter)	CAPACITY (gallon)			Ø DIA. (MM)	LEINGHT (MM)	HEIGHT (MM)	INLET PIPE	OUTLET PIPE	RETURN LINE	DRAIN
L750HFM	LIMA	750	198.4	380V/400V, 50/60Hz, 3PH	24	900	2150	1330	1 1/4"	1 1/4"	1 1/4"	1"
L1000HFM	LIMA	1000	264.5	380V/400V, 50/60Hz, 3PH	36	900	2450	1330	1 1/4"	1 1/4"	1 1/4"	1"
L1300HFM	LIMA	1300	343.9	380V/400V, 50/60Hz, 3PH	36	1300	1895	1730	1 1/2"	1 1/2"	1 1/2"	1 1/4"
L1500VFM	LIMA	1500	396.8	380V/400V, 50/60Hz, 3PH	48	1300	2450	1730	1 1/2"	1 1/2"	1 1/2"	1 1/4"
L2000VFM	LIMA	2000	529.1	380V/400V, 50/60Hz, 3PH	60	1300	2550	1730	2"	2"	2"	1 1/4"
L2500VFM	LIMA	2500	661.3	380V/400V, 50/60Hz, 3PH	72	1300	2868	1730	2"	2"	2"	1 1/4"
L3000VFM	LIMA	3000	793.6	380V/400V, 50/60Hz, 3PH	84	1300	3430	1730	NB50	NB50	NB50	1 1/4"
L3500VFM	LIMA	3500	925.9	380V/400V, 50/60Hz, 3PH	96	1600	2586	2080	NB50	NB50	NB50	1 1/4"
L4000VFM	LIMA	4000	1058.2	380V/400V, 50/60Hz, 3PH	108	1600	3090	2080	NB75	NB75	NB75	2"
L5000VFM	LIMA	5000	1322.7	380V/400V, 50/60Hz, 3PH	120	1600	3087	2080	NB75	NB75	NB75	2"
L6000VFM	LIMA	6000	1587.3	380V/400V, 50/60Hz, 3PH	144	1950	2680	2430	NB100	NB100	NB100	2"
L7000VFM	LIMA	7000	1851.8	380V/400V, 50/60Hz, 3PH	156	1950	3090	2430	NB100	NB100	NB100	2"
L8000VFM	LIMA	8000	2116.4	380V/400V, 50/60Hz, 3PH	168	2240	2750	2720	NB100	NB100	NB100	2"
L9000VFM	LIMA	9000	2380.9	380V/400V, 50/60Hz, 3PH	180	2240	3030	2720	NB150	NB150	NB150	3"
L10000VFM	LIMA	10000	2645.5	380V/400V, 50/60Hz, 3PH	192	2240	3338	2720	NB150	NB150	NB150	3"

* 460V and 480V, 3Phase are special, request only.


* 220V, 3Phase are special, request only.

* Customize design are available as per request.


* Contact us for request of different wattage, voltage rates, or storage section material.

CALORIFIER PARTS & MATERIALS

VERTICAL FLOOR MOUNT CUSTOMIZED WATER HEATER

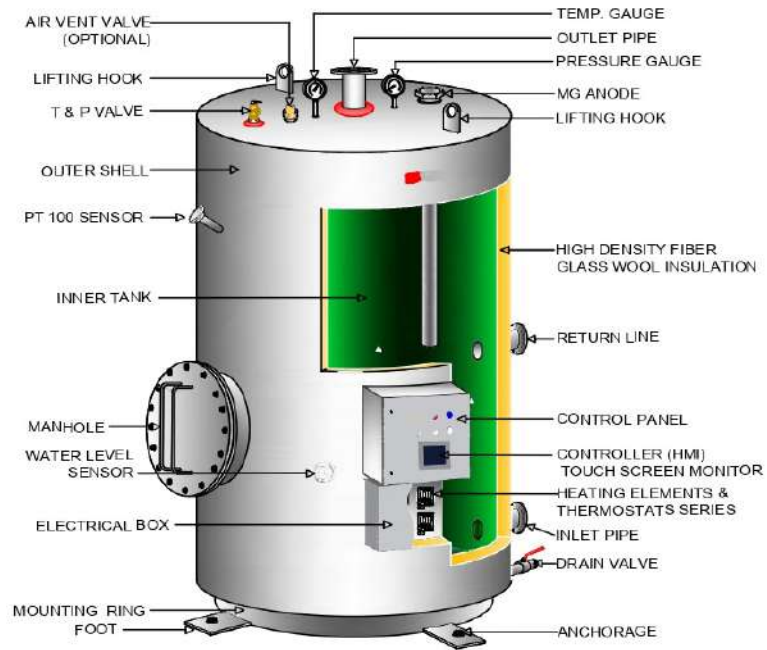

HORIZONTAL FLOOR MOUNT CUSTOMIZED WATER HEATER

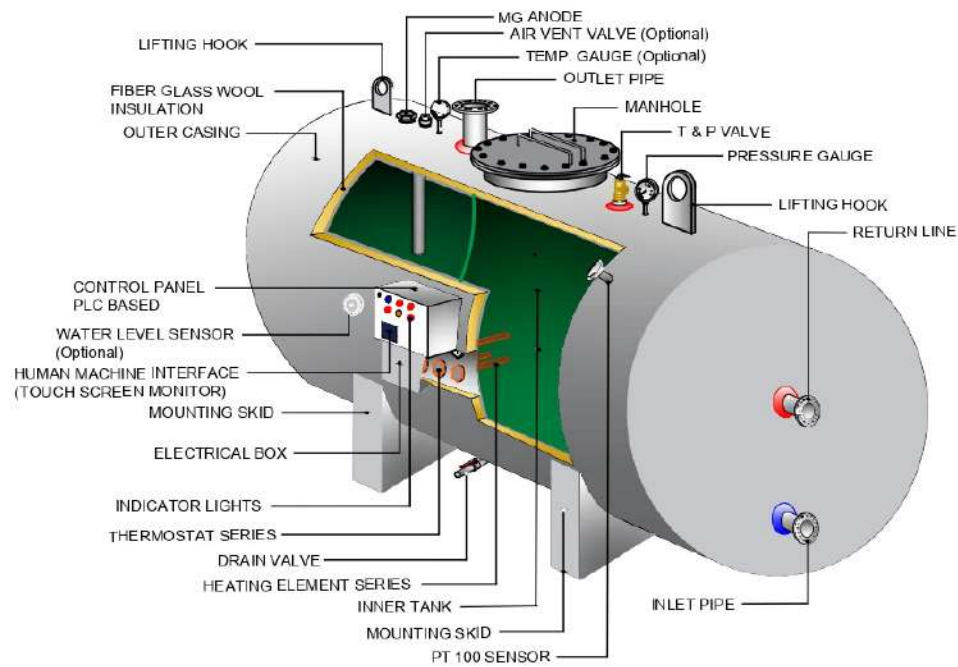


CALORIFIER MATERIALS



SAFETY VALVES



INDICATOR LIGHTS

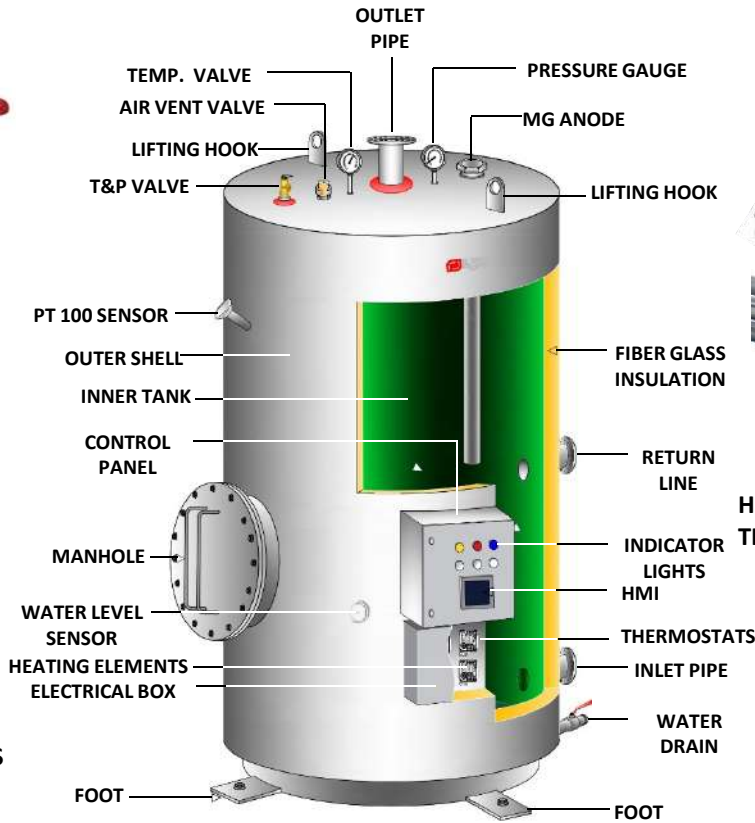

HEATING ELEMENTS & THERMOSTATS COMPONENTS



CONTROLLER (HMI)



ELECTRICAL BOX & PANELS




THERMOMETERS SENSORS & GAUGES



BREAKERS (MCB)



PLC

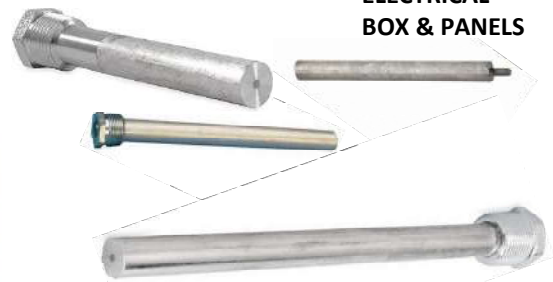

MAGNESIUM ANODES



CALORIFIER PRODUCTION LINE




Reem factory is based on customer satisfaction with continues innovation and improvement thru efficiency and we guarantee for a high quality performance of the products for our customer benefits.

CUSTOMIZED SOLAR WATER HEATER



SPECIFICATON			
MODEL:	L150SH	L200SH	L300SH
TYPE:	SOLAR OUTDOOR	SOLAR OUTDOOR	SOLAR OUTDOOR
CAPACITY:	150 Liter	200 Liter	300 Liter
MOUNTING:	HORIZONTAL	HORIZONTAL	HORIZONTAL
DIAMETER:	560	560	560
LENGTH:	1085	1125	1525
HEIGHT:	1560	1560	1560
RATED PRESSURE (BAR):	150 Psi/ 10 BAR	150 Psi/ 10 BAR	150 Psi/ 10 BAR
PRESSURE TEST (BAR):	300 Psi/ 20 BAR	300 Psi/ 20 BAR	300 Psi/ 20 BAR
STAGNANT TEMP. (°C)	85°C	85°C	85°C
PANEL DIMENSION (MM)	2000X1010X73	2000X1010X73	2000X1010X73

1. INLET PIPE: 3/4"
2. OUTLET PIPE: 3/4"
3. CIRCULATION PIPE: 3/4"
4. DRAIN VALVE: 3/4"
5. T&P VALVE: 3/4"
6. SOLAR PANEL:
7. ELECTRICAL BACK UP
220V/240V, 50/60Hz
8. STAND (Inclination 30°)
TEMP SETTING: 65°C

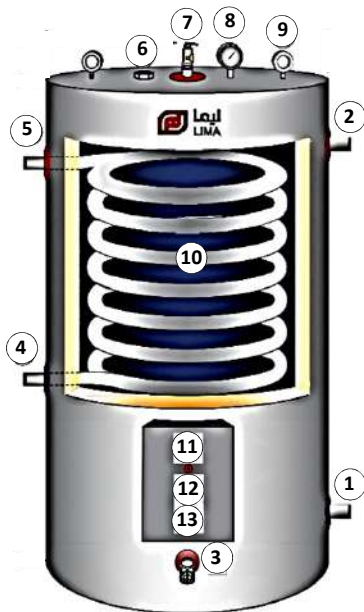

SOLAR SPLIT TYPE

MODEL: L500STVFM
 BRAND: LIMA
 CAPACITY: 500 LITER
 MOUNTING: VERTICAL FLOOR MOUNT
 DIAMETER: 760 MM
 HEIGHT: 1490 MM
 BACK-UP: 380V/400V, 50/60Hz, 3Ph +N, E
 WORKING PRASSURE: 150 Psi (10 BAR)
 PRESSURE TEST: 300 Psi (20 BAR)
 TEMPERATURE CUT OUT: 60°C

1. COLD WATER INLET- 3/4" BSP
2. HOT WATER OUTLET- 3/4" BSP
3. DRAIN VALVE- 3/4"
4. SOLAR INLET PIPE CONNECTION- 3/4"
5. SOLAR OUTLET PIPE CONNECTION- 3/4"
6. MAGNESIUM ANODE- Ø27 MM
7. T&P VALVE- 3/4"
8. TEMPERATIRE GAUGE- 1/2"
9. LIFTING HOOK- 2
10. HEAT EXCHANGER COIL
11. ELECTRICAL BOX (IP66)
12. THERMOSTATS
13. HEATING ELEMENTS

* Customize design are available as per request.
 * Please contact us for request of different kW, voltage rates or storage section material.

LIMA SOLAR WATER HEATER

5 YEARS WARRANTY



REEM WATER HEATER FACTORY



PACKAGING AND SHIPPING INFORMATION



Item No.:	Capacity Liters	Gross Weight (Kg)	Units in 40ft HQ Container	Units in 40ft Trailer	Units in 50ft Trailer
1	30	14	625	625	800
2	50	17	500	500	640
3	80	24	375	375	480
4	100	27	250	250	372
5	120	31	250	250	320




PRODUCTION MACHINES AND ASSEMBLY LINE



STEEL COIL PROCESSING LINE



AUTOMATIC WELDING LINE

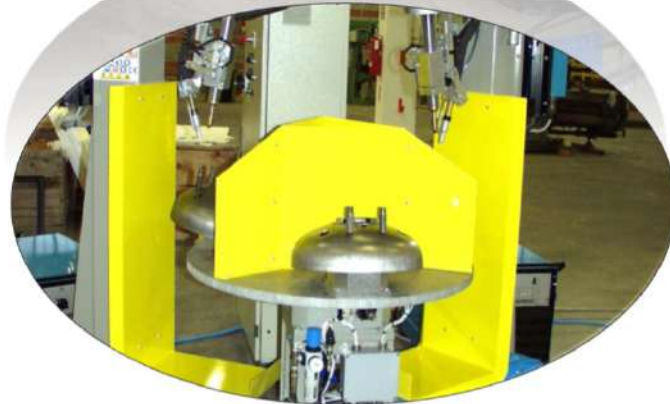

INNER TANK PROCESSING LINE



OUTER SHELL ASSEMBLY LINE

SASO GSO 1858/2012



الهيئة السعودية للمواصفات والمقاييس والجودة
Saudi Standards, Metrology and Quality Org.

شهادة ترخيص باستعمال علامة الجودة License For Use of The Quality Mark

رقم الترخيص: 20220314601 License Number:

SASO certifies that it has granted the right to use (SASO) quality mark on the following products, after fulfilling the required requirements according to the related normative references:

تشهد الهيئة السعودية للمواصفات والمقاييس والجودة بأنها رخصت باستخدام علامة الجودة على المنتجات الموضحة أدناه بعد استيفاءها للمتطلبات اللازمة وفق المراجع القياسية الخاصة بها:

The Establishment:	شركة مصنع ريم للسخانات	المنشأة:
The Establishment's Address:	الرياض - المنطقة الصناعية الثانية	عنوان المنشأة:
Production Line Location:	الرياض - المنطقة الصناعية الثانية	موقع خط الإنتاج:
Normative References:	SASO GSO 1858/2012	المراجع القياسية:
The Trade Mark:	LIMA	العلامة التجارية:
The Product:	سخانات الماء الكهربائية من النوع التخزيني للاستخدام المنزلي	المنتج: تفاصيل المنتج من قسمها:
Date of Granting:	2022/02/01	تاريخ المنح:
Date of Renewal:		تاريخ التجديد:
Date of Expiry:	2025/01/31	تاريخ الانتهاء:

نائب المحافظ للمطابقة والعمليات
Vice-Governor, Operations and Conformity



المهندس / سعود بن راشد العسكر
Eng. Saud R. AlAskar



لتأكد من صحة هذه الشهادة يرجى زيارة موقعنا على الإنترنت، وأي خطأ أو تغيير في هذه الشهادة ينعكس عليها.
To verify this certification visit SASO website, and any changes or modification on this certificate will affect its validity.

1 / 2

المملكة العربية السعودية Kingdom of Saudi Arabia | الرياض 11471 | ص ب 3437 P.O.Box 3437 Riyadh 11471 | T 920009085 | F +966114520086 | www.saso.gov.sa | info@saso.gov.sa



ISO 9001:2015



RIR CERTIFICATION
Partners in Growth

CERTIFICATE

Reem Water Heater Factory

2nd Industry city, Post Box- 1183, Kingdom of Saudi Arabia.

RIR certifies that the quality management system of the organization has been assessed and found to be in accordance with the requirements of the following standard:

ISO 9001:2015

SCOPE

Manufacture and Sale of Domestic, Commercial Water Heaters, Solar Water Heater in all sizes

EA CODE- 19

Certificate No	: 1627/REE09A
Registration Date	: 17.04.2023
Issue Date	: 17.04.2023
Reissue Due Date	: 16.04.2024
1 st Surveillance Date	: On / Before 16.04.2024
2 nd Surveillance Date	: On / Before 16.04.2025
Recertification Date	: On / Before 16.04.2026



MEMBER OF MULTILATERAL
IAF
ACCREDITATION ARRANGEMENT



IAS
ACCREDITED
Management System
Certification Body
MSCB-127



REGISTERED

ISO 9001:2015



 Certification Manager

RIR CERTIFICATION PRIVATE LIMITED

323, Tower B4, Spaze I-Tech Park, Sector-49, Sohna Road, Gurgaon-122018, IND
 Accredited by International Accreditation Services (Accreditation No. MSCB-127)
 West Coast, 3060 Saturn Street, Suite 100 Brea, California 92821-1732 U.S.A

This certification was conducted in accordance with RIR auditing & certification procedures and subject to regular surveillance audits.
 Certification period is 3 years. Verifiable at <http://www.rircert.com/certificate-search.php> or at e-mail: info@rircert.com